

Warranty:


- ◆ 5 years Manufacturer Warranty
- ◆ Warranty on Electrical Performan: 10 years 90%, 25 years 80% of power output.

Manufacturing:

- ◆ Original cell sorting system ensures the best electric cell match
- ◆ EL-Testing before packing
- ◆ Comprehensive module power testing

Performace:

- ◆ Advanced monocrystalline cell technology ensures higher energy conversion and stable power output.
- ◆ Stable output in low light.
- ◆ Intergraded bypass diodes for each cell is not only fireproof ensuring the continuous output even part of the cells are damaged.
- ◆ Durable and reliable, with enhanced resistance to environmental stress for a longer service life.
- ◆ Ideal for balconies, RVs, and BIPV applications.

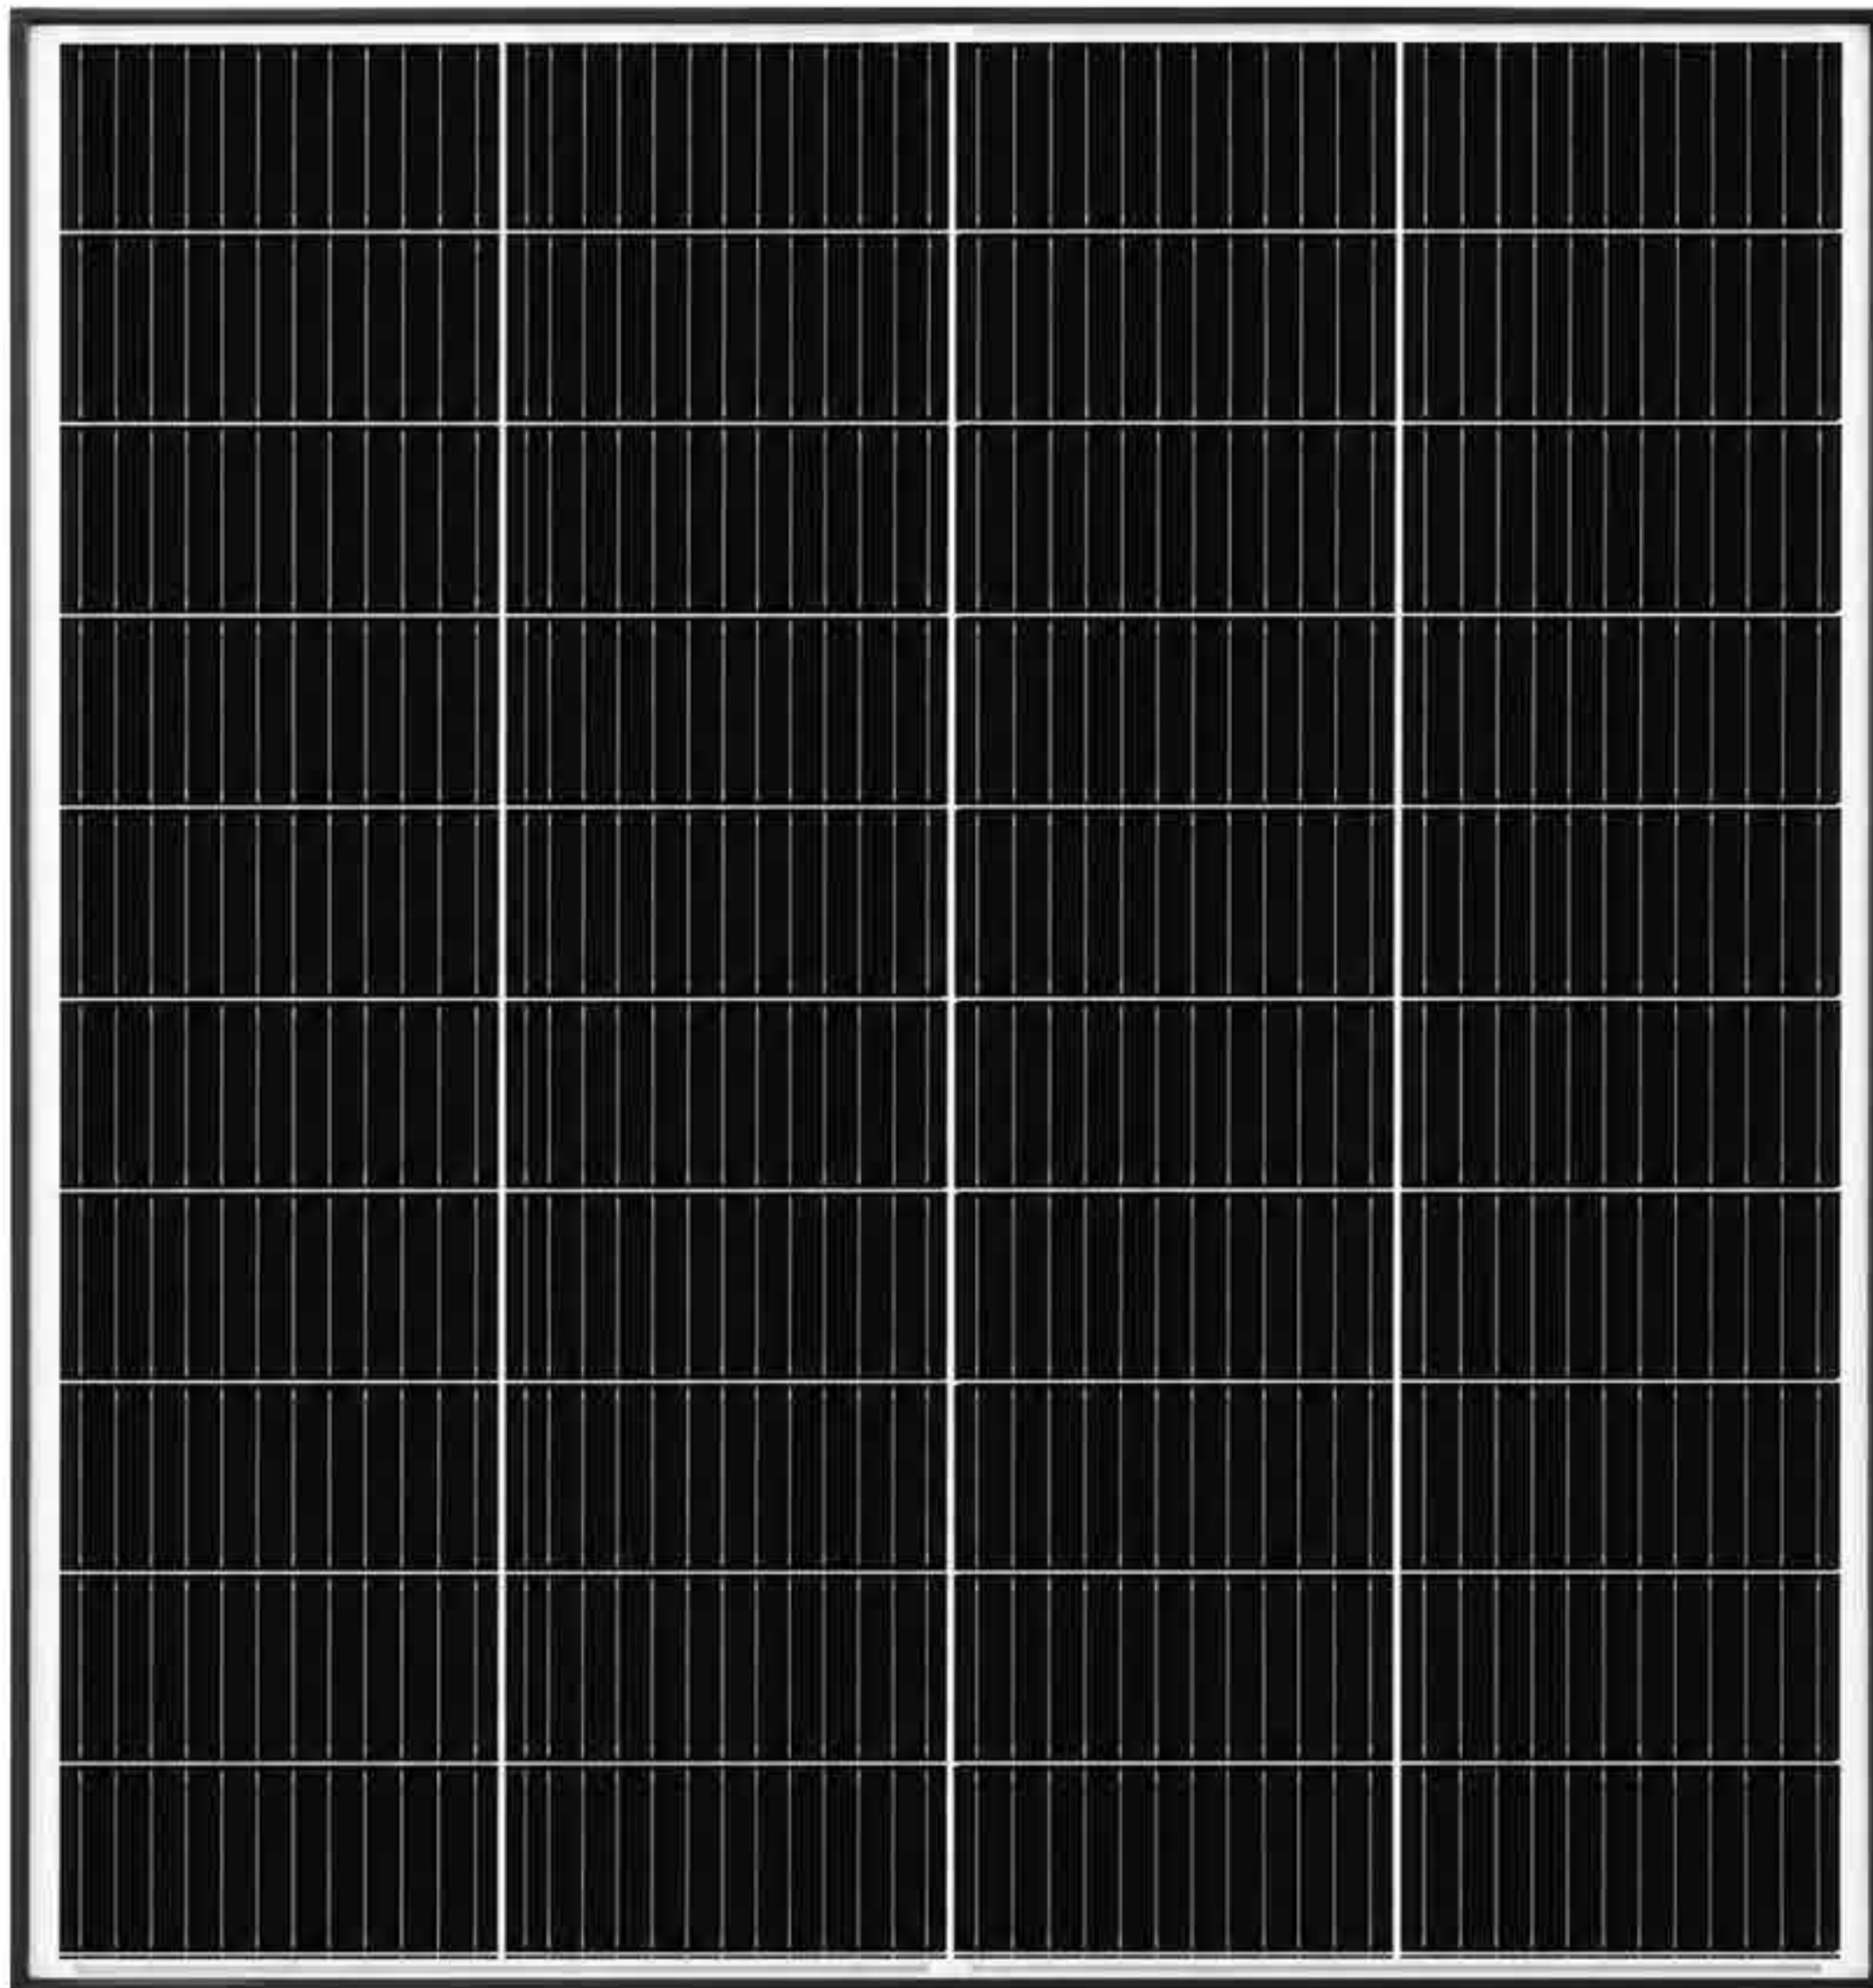

Mechanical Data

Standard Test Conditions AM=1.5,E=1000W/m²,TC=25°C

Nominal Power	200W
Cell Type	Mono-crystalline
Cell Efficiency	≥22%
Maximum Power Current (Impp)	8.63A
Maximum Power Voltage (Vmpp)	23.20V
Open-circuit Voltage (Voc)	27.20V
Short-circuit Current (Isc)	9.15A
Maximum System Voltage	500V
Output Tolerance	0~+3%
Cable (MC4)	700mm/2.5mm ²
Module Structure	Glass / Cell / EVA / Al Frame
Junction box rating	≥IP67
Diode	√
Operating temperature range	-40°C~+80°C

Packaging

Module Dimensions	1100*890*30mm
Module Weight	10.2/12.2kg
Package	Single package
Pieces per Pallet	30pcs
Gross Weight per Pallet	400kg
Pallet Dimensions	1200*1100*1040mm

SOLMAX NEW ENERGY B.V.

Address: defensiedok 18, 3433 KL Nieuwegein, Utrecht ,NL

TEL:0031-307855708

Whatsapp:031-620074476

Email:info@solarfam.nl

